




## LEXMARK OPTRA S & T

### IBM 1120/1125/1130/1140/1222/1332/1352/1372/1422/1532/1552/1572

Please allow printer to sit for 30 minutes powered off before performing this task.

#### **Fuser Installation:**

1. If a duplex unit is installed, remove the printer from it by using the handholds. This may require two people.
2. Remove the fuser cover (this cover is located on the top cover where the paper comes to rest after it prints.)
3. Open the rear access door slightly and pull up at a slight angle to remove.
4. Loosen the two screws on the redrive unit; remove by pulling outward by the tabs on upper left and right. **PIC 1**
5. Loosen the two screws on the fuser assembly and pull the fuser from the printer. **PIC 2**
6. Install the new fuser in reverse fashion.

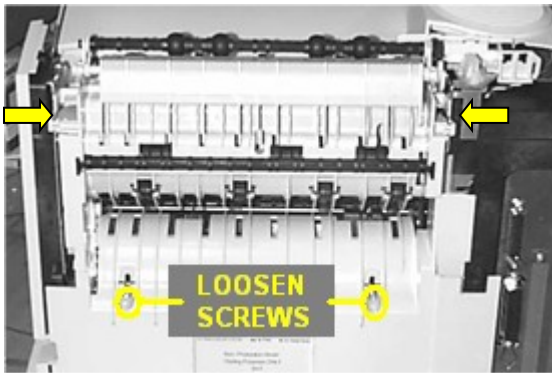

**PIC 1**



**PIC 2**

#### **TO CLEAR THE '80 SCHEDULED MAINTENANCE' MESSAGE AND RESET THE MAINTENANCE PAGE COUNT PERFORM THE FOLLOWING STEPS.**

1. Turn the printer power off.
2. While pressing and holding SELECT and RETURN turn the printer power on. Press GO and CONFIG MENU will appear on the display.
3. Press and release MENU>or<MENU until RESET MAINT CNT appears on the second line of the display.
4. Press SELECT twice to reset the counter.
5. Turn the power off and the printer is ready to resume operating.

#### **ERROR CODES:**

- 913 Paper Jam May have bad sensor
- 920 Low fuser temp
- 921 Low fuser temp
- 922 Low fuser temp
- 923 High fuser temp
- 924 Open circuit to thermistor Check connections
- 925 Wrong Fuser Model